

SERIES 2300

DRYWALL/HVAC LIFT

SUMNER

Sumner Manufacturing Co., Inc.

Perfect For One Man Drywall, Light Fixture & Ductwork Installation



Cradle tilts up to 45° for cathedral ceilings.



Fits through doorways!



Loads at a convenient 34" (86 cm).



Optional HVAC/
Light Cradle
Part No. 784474

Series 2300 Features:

- Solid, safe construction (CE)
- Two speed winch handle
- Quick, tool-free assembly
- One person operation
- Tilts 65° for drywall installation
- Lifts loads of 150 lbs (70 kg)
- Available in 11 ft (3.4 m) & 15 ft (4.5 m) heights
- Lightweight

Drywall lift truck available!

Part No. 784510




Lift conveniently disassembles for easy transport. Convenient carrying handle!



Fits in a car trunk!

SERIES 2300 DRYWALL/HVAC LIFT

Series 2300 Features ...

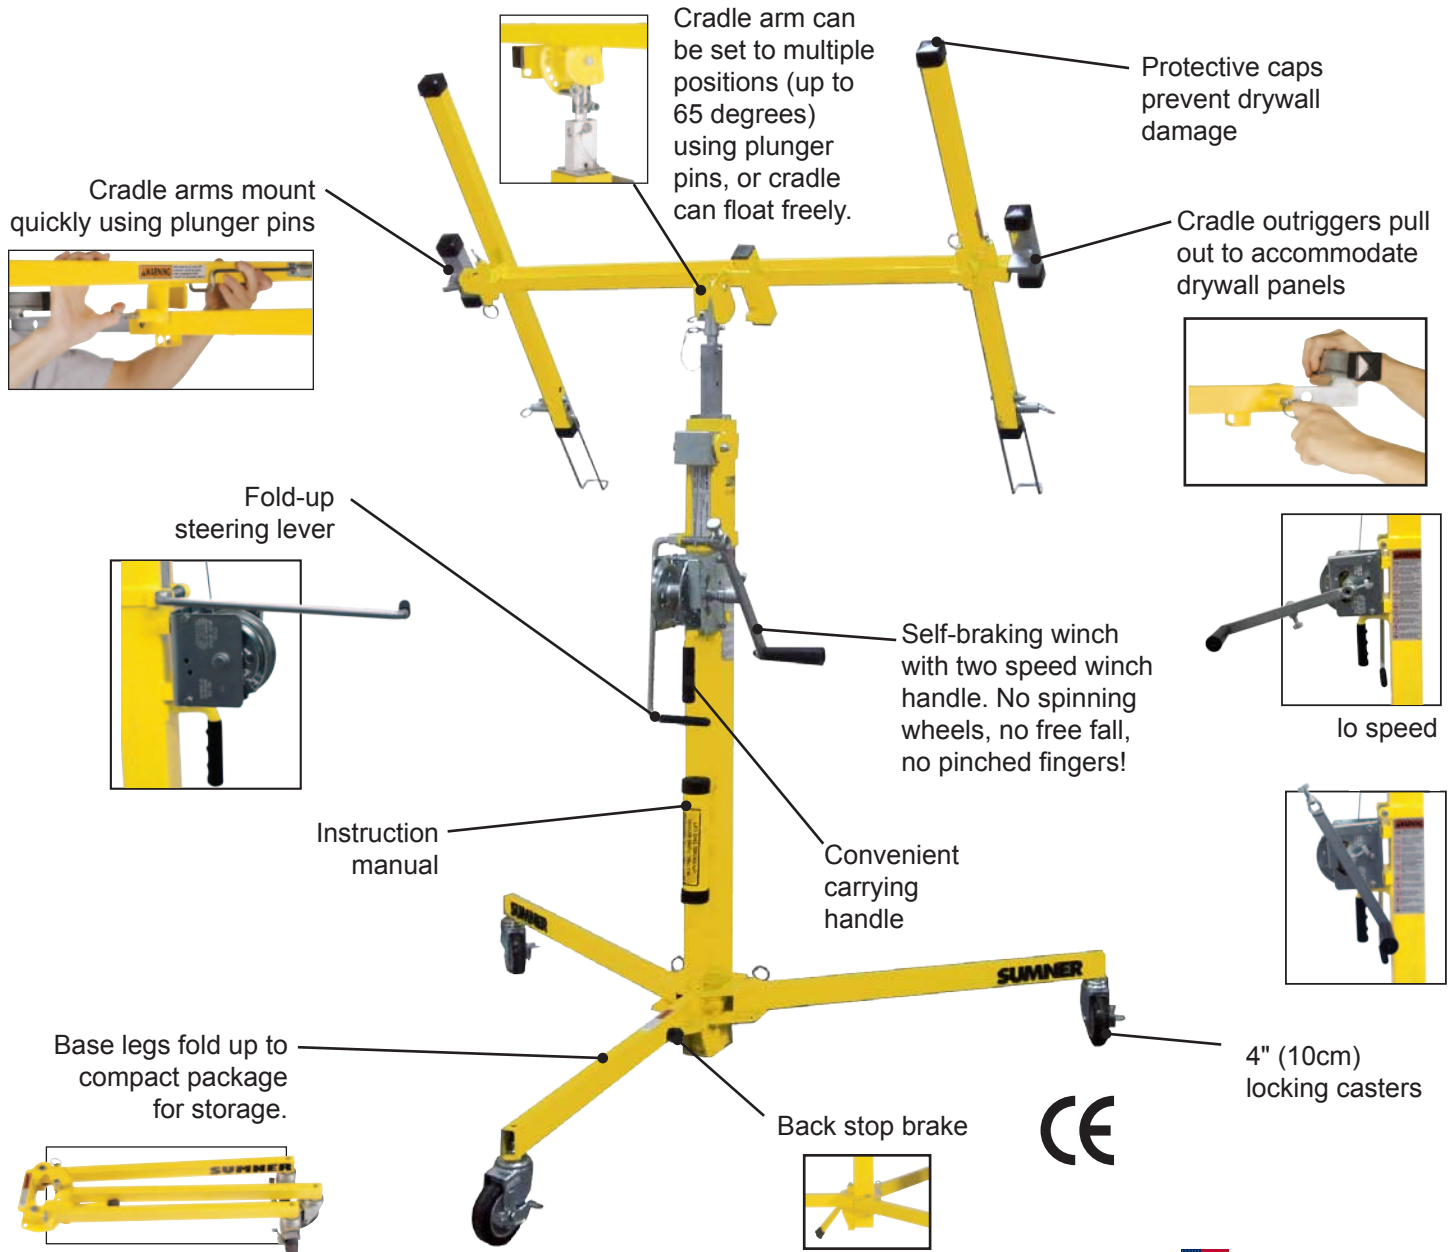

 MADE IN USA

Part No.	Description	Load Height (maximum)		Load Height (minimum)		Load Capacity		Max. Drywall Dimensions		Base Height		Base Footprint (open)		Lift Weight	
		Feet	Meter	Inch	cm	lb	kg	Feet	Meter	Inch	cm	Inches	meters	lb	kg
784345	2311 Drywall Lift	11' 2-3/4"	3.4	34.0"	86.0	150	70	4x12	1.2x3.7	7"	18	55x55x52	1.4x1.4x1.3	109	49.4
784346	2315 Drywall Lift	14' 9-3/4"	4.5	48.0"	122.0	150	70	4x12	1.2x3.7	7"	18	55x55x52	1.4x1.4x1.3	115	52.1
784332	2315 HVAC Cradle Lift	14' 9-3/4"	4.5	48.0"	122.0	150	70	N/A	N/A	7"	18	55x55x52	1.4x1.4x1.3	87	39.5
784340	2311 Standard Model with single cable, mast and base only, no cradle.														
784342	2315 Standard Model with single cable, mast and base only, no cradle.														

DISTRIBUTED BY:

SUMNER

Sumner Manufacturing Co, Inc.
www.sumner.com

Sumner - U.S. 7514 Alabonson Road • Houston, TX 77088 • Ph: 281-999-6900 • Fax: 281-999-6966

Sumner - Canada 75 Saltsman Drive, Unit 5 • Cambridge, Ontario N3H 4R7 • Ph: 519-653-5300 • Fax: 519-653-5305

Sumner - Netherlands Midden Engweg 21 • NL-3882TS Putten • The Netherlands • Ph: +31 (0) 85 489 0284 • europeansales@sumner.com

Sumner - U.K. Unit 3 Kempton Road • Keytec 7 Business Park • Pershore, Worcestershire WR10 2TA • Ph: (44) 01386 556278 • Fax: (44) 01386 556776